

Pro. Air Tec. Co., Ltd.

Office Address: 12F, No. 520, Sec. 4, Ren Ai Rd., Taipei, Taiwan

Tel: +886 2 27205102 Fax: +886 2 27207076

China Factory: Zhongshan Lianchang Co., Ltd.

No.72 Changjiang Road, Zhongshan, Guangdong, PRC

Tel: +86(760)2819-3262 +86(760)8832-4886#207

Email address: rd-chencb@mail-airmaster.com.tw

Website: <http://united-airmaster.com>



Dehumidifier

MODEL: PD-WAE

COLOR OPTIONS:



Any injection color




Any spray color



Any In-Mold Decoration



PRODUCT FEATURES:


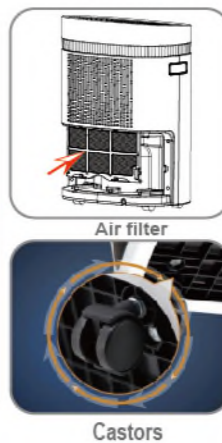


SPECIFICATIONS:

Model	PD20-WAE	PD30-WAE	PD35-WAE
Power source	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
Control	Electronic	Electronic	Electronic
Moisture removed 30 °C, RH80%	20L/Day	30L/Day	35L/Day
Refrigerant type	R290	R290	R290
Water tank volume	4.8	4.8	4.8
Noise (dB(A))	51	51	51
Unit Dimensions (mm) (WxDxH)	408 x 268 x 574	408 x 268 x 574	408 x 268 x 574
Packing Dimensions (mm) (WxDxH)	496 x 356 x 620	496 x 356 x 620	496 x 356 x 620
Weight (kg) (Net/Gross)	17/18.3	18/19.3	18.5/20
Container Loading (20'FT/40'GP/40'HQ)	216 / 459 / 612	216 / 459 / 612	216 / 459 / 612

Functions and performance

(optional functions are for electric control model only)



(optional)

(optional)

Dehumidifier

MODEL: **PD-JAM**

COLOR OPTIONS:



Any injection color



Any spray color



Any In-Mold Decoration

- Unique 2-Way Dehumidifier
- Round Louvered Vent
- Water Resistant Design



PRODUCT FEATURES:



Air outlet



Handle



Air filter



Independent switch



Water tank




Special tank storage method

SPECIFICATIONS:

Model	PD10-JAM
Power source	220-240V/50Hz
Moisture removed 30 °C, RH80%	10L/Day
Moisture removed 27 °C, RH60%	5L/Day
Power consumption 30°C, RH80% (W)	190
Operating current 30°C, RH80% (A)	0.9
Noise (dB(A))	< 43
Unit Dimensions (mm) (WxDxH)	314 x 180 x 482
Packing Dimensions (mm) (WxDxH)	344 x 210 x 443
Weight (kg) (Net/Gross)	9.5/10.6
Container Loading (20'FT/40'GP/40'HQ)	900 / 1875 / 2203

Functions and performance



Low noise



Water full indicator



4L water tank



Durable Mounted Rack

Dehumidifier

MODEL: PD-ECM/ECR/ECE

COLOR OPTIONS:



Any injection color



Any spray color



Any In-Mold Decoration

PD-ECM



PD-ECR



PD-ECE



PRODUCT FEATURES:

Control panel



PD-ECM(ON/OFF CONTROL)



PD-ECR(MECHANICAL CONTROL)



PD-ECE(ELECTRIC CONTROL)



Handle



Air filter




Castors (Optional)

SPECIFICATIONS:

Model	PD10-ECM/ECE	PD12-ECM/ECE	PD10-ECR	PD12-ECR
Power source	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
Moisture removed 30 °C, RH80%	10L/Day	12L/Day	10L/Day	12L/Day
Power consumption (W)	250	260	250	260
Noise (dB(A))	42	43	42	43
Unit Dimensions (mm) (WxDxH)	312 x 243 x 417		312 x 243 x 417	
Packing Dimensions (mm) (WxDxH)	334 x 278 x 443		334 x 278 x 448	
Weight (kg) (Net/Gross)	10.1/11	10.6/11.5	10.1/11	10.6/11.5
Container Loading (20'FT/40'GP/40'HQ)	705 / 1445 / 1723		705 / 1445 / 1445	

Functions and performance

(optional functions are for electric control model only)




Low noise



Water full indicator




1.6L water tank




Auto restarts

(optional)



Setting RH 30%-90%

(optional)



24 hours timer

(optional)

Dehumidifier

MODEL: PD-EAM/FAM

COLOR OPTIONS:



Any injection color



Any spray color



Any In-Mold Decoration

PD-EAM



PD-FAM




PRODUCT FEATURES:



PC-EAM control panel



PC-FAM control panel

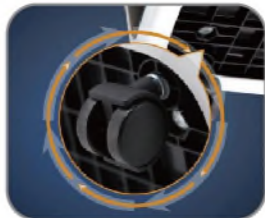

Castors (Optional)



PD-EAM air filter



PD-FAM air filter




Handle

SPECIFICATIONS:

Model	PD10-EAM	PD12-EAM	PD10-FAM	PD12-FAM
Power source	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
Moisture removed 30 °C, RH80%	10L/Day	12L/Day	10L/Day	12L/Day
Power consumption (W)	250	260	250	260
Noise (dB(A))	42	43	42	43
Unit Dimensions (mm) (WxDxH)	312 x 235 x 417	312 x 235 x 417	327 x 240 x 426	327 x 240 x 426
Packing Dimensions (mm) (WxDxH)	334 x 260 x 443	334 x 260 x 443	337 x 250 x 443	337 x 250 x 443
Weight (kg) (Net/Gross)	10.2/11.1	10.6/11.5	10.1/11	10.6/11.5
Container Loading (20'FT/40'GP/40'HQ)	755 / 1565 / 1874	755 / 1565 / 1874	765 / 1575 / 1886	765 / 1575 / 1886

Functions and performance

(optional functions are for electric control model only)



Low noise



Water full indicator



1.6L/1.8L big water tank



One button control

Dehumidifier

MODEL: **PD-PAE/PAM1**

COLOR OPTIONS:



Any injection color



Any spray color




Any In-Mold Decoration



PRODUCT FEATURES:



PD-PAE

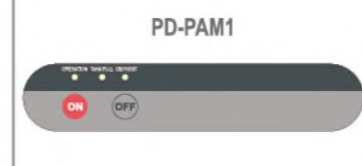

PD-PAM1

Control panel



Handle



Air filter



Water tank




Castors (For PD16/PD20)

SPECIFICATIONS:

Model	PD10-PAE/PAM1	PD12-PAE/PAM1	PD16-PAE/PAM1	PD20-PAE/PAM1
Power source	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
Moisture removed 30 °C, RH80%	10L/Day	12L/Day	16L/Day	20L/Day
Power consumption (W)	250	260	410	480
Noise (dB(A))	42	43	46	48
Unit Dimensions (mm) (WxDxH)	300 x 239 x 524	300 x 239 x 524	300 x 239 x 524	300 x 239 x 524
Packing Dimensions (mm) (WxDxH)	328 x 263 x 545	328 x 263 x 545	328 x 263 x 545	328 x 263 x 545
Weight (kg) (Net/Gross)	11.5/12.6	11.7/12.8	13.3/14.5	14.5/15.4
Container Loading (20'FT/40'GP/40'HQ)	616 / 1260 / 1260	616 / 1260 / 1260	616 / 1260 / 1260	616 / 1260 / 1260

Functions and performance

(optional functions are for electric control model only)




Low noise



Water full indicator




4L water tank



Auto restarts

(optional)



Setting RH 30%-90%



24 hours timer

Dehumidifier

MODEL: **PD-GAE/GBR/HAE**

COLOR OPTIONS:



Any injection color



Any spray color



Any In-Mold Decoration

PD-GAE



PD-GBR



PD-HAE



PRODUCT FEATURES:

Control panel



PD-GAE/HAE



PD-GBR



Handle



Air filter



Water tank




Castors

SPECIFICATIONS:

Model	PD25-GAE/GBR	PD30-GAE/GBR	PD50-HAE	PD60-HAE	PD70-HAE
Power source	220-240V/50Hz		220-240V/50Hz		
Moisture removed 30 °C, RH80%	25L/Day	30L/Day	50L/Day	60L/Day	70L/Day
Power consumption (W)	370	390	830	860	930
Noise (dB(A))	46	47	48	49	50
Unit Dimensions (mm) (WxDxH)	360 x 246 x 506		405 x 268 x 632		
Packing Dimensions (mm) (WxDxH)	398 x 288 x 535		445 x 320 x 666		
Weight (kg) (Net/Gross)	17.5/18.7	18/19.2	18.6/19.9	19/20.5	19.5/21
Container Loading (20'FT/40'GP/40'HQ)	464 / 952 / 952		276 / 561 / 742		

Functions and performance

(optional functions are for electric control model only)




Low noise



Water full indicator




4.5L/6.5L big water tank




Auto restarts

(optional)



Setting RH 30%-90%



24 hours timer

(optional)

Dehumidifier

MODEL: PD-CAE/CAR

COLOR OPTIONS:



Any injection color



Any spray color



Any In-Mold Decoration

PD-CAE



PD-CAR



PRODUCT FEATURES:



PC-CAE control panel



PC-CAR control panel



Handle



Air filter



Castors (For PD16/PD20)

SPECIFICATIONS:

Model	PD10-CAE/CAR	PD12-CAE/CAR	PD16-CAE/CAR	PD20-CAE/CAR
Power source	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
Moisture removed 30 °C, RH80%	10L/Day	12L/Day	16L/Day	20L/Day
Power consumption (W)	250	260	410	480
Noise (dB(A))	42	43	46	48
Unit Dimensions (mm) (WxDxH)	340 x 220 x 495	340 x 220 x 495	340 x 220 x 495	340 x 220 x 495
Packing Dimensions (mm) (WxDxH)	385 x 265 x 530	385 x 265 x 530	385 x 265 x 530	385 x 265 x 530
Weight (kg) (Net/Gross)	11.5/12.6	11.7/12.8	13.3/14.5	13.8/14.8
Container Loading (20'FT/40'GP/40'HQ)	512 / 1044 / 1302	512 / 1044 / 1302	512 / 1044 / 1302	512 / 1044 / 1302

Functions and performance

(optional functions are for electric control model only)



Low noise



Water full indicator




2.1L water tank




Auto restarts

(optional)



Setting RH 30%-90%

(optional)



24 hours timer

(optional)

Dehumidifier

MODEL: PD-DAE/DAR

COLOR OPTIONS:



Any injection color



Any spray color



Any In-Mold Decoration

PD-DAE



PD-DAR



PRODUCT FEATURES:



Air outlet



control panel



Handle



Air filter



Castors (For PD16/PD20)

SPECIFICATIONS:

Model	PD10-DAE/DAR	PD12-DAE/DAR	PD16-DAE/DAR	PD20-DAE/DAR
Power source	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
Moisture removed 30 °C, RH80%	10L/Day	12L/Day	16L/Day	20L/Day
Power consumption (W)	250	260	410	480
Noise (dB(A))	42	43	46	48
Unit Dimensions (mm) (WxDxH)	365 x 220 x 508	365 x 220 x 508	365 x 220 x 508	365 x 220 x 508
Packing Dimensions (mm) (WxDxH)	403 x 258 x 530	403 x 258 x 530	403 x 258 x 530	403 x 258 x 530
Weight (kg) (Net/Gross)	11.5/12.6	11.7/12.8	13.3/14.5	14.5/15.4
Container Loading (20'FT/40'GP/40'HQ)	504 / 1064 / 1318	504 / 1064 / 1318	504 / 1064 / 1318	504 / 1064 / 1318

Functions and performance

(optional functions are for electric control model only)




Low noise



Water full indicator




2.2L water tank



Auto restarts


RESTART

(optional)



Setting RH 30%-90%

(optional)



24 hours timer

(optional)

Dehumidifier

MODEL: **PD-S/L SERIES**

COLOR OPTIONS:



Any injection color



Any spray color



Any In-Mold Decoration

PD-SAR



PD-SCE



PD-LEE



PRODUCT (S SERIES):



PD-SAE



PD-SAR



PD-SGE



PD-SDR



PD-SDE



PD-SCE



PD-SER



PD-SEE



PD-SFR



PD-SFE



PD-SIE



PD-SIR



PD-SAN



PD-SDN



PD-SAM



PD-SDM



PD-SJE



PD-SJR

PRODUCT (L SERIES):



PRODUCT FEATURES:

Control Panel



S SERIES air filter L SERIES air filter Handle
S SERIES water tank L SERIES water tank Castors

SPECIFICATIONS:


Model	PD10-S SERIES	PD12-S SERIES	PD16-S SERIES	PD20-S SERIES
Power source	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
Moisture removed 30 °C, RH80%	10L/Day	12L/Day	16L/Day	20L/Day
Power consumption (W)	250	260	410	480
Noise (dB(A))	42	43	46	48
Unit Dimensions (mm) (WxDxH)	365 x 220 x 490	365 x 220 x 490	365 x 220 x 490	365 x 220 x 490
Packing Dimensions (mm) (WxDxH)	395 x 253 x 530	395 x 253 x 530	395 x 253 x 530	395 x 253 x 530
Weight (kg) (Net/Gross)	11.1/12.2	11.2/12.3	13.3/14.4	13.7/14.8
Container Loading (20'FT/40'GP/40'HQ)	524 / 1080 / 1341	524 / 1080 / 1341	524 / 1080 / 1341	524 / 1080 / 1341

Model	PD30-L SERIES	PD40-L SERIES	PD50-L SERIES
Power source	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
Moisture removed 30 °C, RH80%	30L/Day	40L/Day	50L/Day
Power consumption (W)	700	700	1150
Noise (dB(A))	46	49	53
Unit Dimensions (mm) (WxDxH)	481 x 286 x 628	481 x 286 x 628	481 x 286 x 628
Packing Dimensions (mm) (WxDxH)	517 x 330 x 665	517 x 330 x 665	517 x 330 x 665
Weight (kg) (Net/Gross)	19.5/21	21/22.5	22/23.5
Container Loading (20'FT/40'GP/40'HQ)	234 / 483 / 634	234 / 483 / 634	234 / 483 / 634

Model	PD60-L SERIES	PD70-L SERIES	PD80-L SERIES
Power source	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
Moisture removed 30 °C, RH80%	60L/Day	70L/Day	80L/Day
Power consumption (W)	1150	1350	1350
Noise (dB(A))	56	58	58
Unit Dimensions (mm) (WxDxH)	481 x 286 x 628	481 x 286 x 628	481 x 286 x 628
Packing Dimensions (mm) (WxDxH)	517 x 330 x 665	517 x 330 x 665	517 x 330 x 665
Weight (kg) (Net/Gross)	23.5/25	23.8/25.3	24/25.5
Container Loading (20'FT/40'GP/40'HQ)	234 / 483 / 634	234 / 483 / 634	234 / 483 / 634

Functions and performance

(optional functions are for electric control model only)

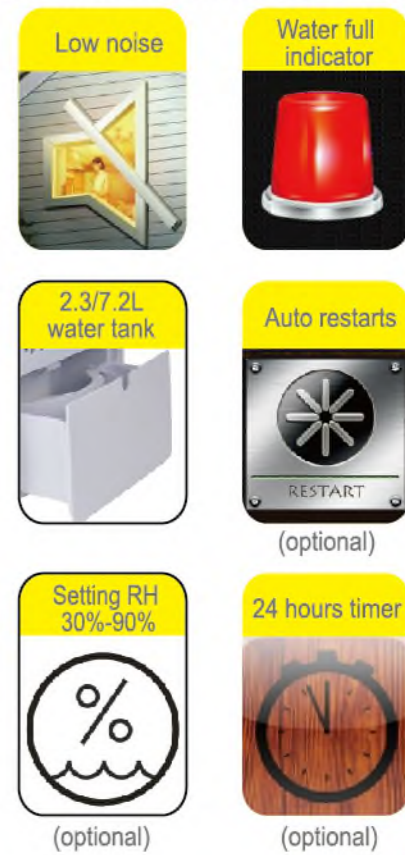

Low noise

Water full indicator

2.3/7.2L water tank

Auto restarts

Setting RH 30%-90%

24 hours timer

(optional)

(optional)

Dehumidifier

MODEL: **PD-SSM/SSE/VAE**

Stainless Steel Housing Dehumidifier



PRODUCT FEATURES:



Functions and performance
(optional functions are for electric control model only)



SPECIFICATIONS:

Model	PD40-SSM	PD40-SSE	PD60-VAE
Power source	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
Moisture removed 30 °C, RH80%	40L/Day	40L/Day	60L/Day
Unit Dimensions (mm) (WxDxH)	400 x 310 x 540	400 x 310 x 540	400 x 310 x 645
Packing Ddimensions (mm) (WxDxH)	450 x 370 x 590	450 x 370 x 590	450 x 370 x 685
Weight (kg) (Net/Gross)	21.4/23.5	21.4/23.5	24.5/26.5
Container Loading (20'FT/40'GP/40'HQ)	237 / 492 / 656	237 / 492 / 656	237 / 492 / 492

